

(19) World Intellectual Property  
Organization  
International Bureau



20 JUL 2004



(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/036817 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 1/06**

(21) International Application Number:  
PCT/EP2002/011695

(22) International Filing Date: 18 October 2002 (18.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006 Kadoma, Kadoma City, Osaka 571-8500 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WENGERTER, Christian** [DE/DE]; Bahnhofstrasse 10d, 63924 Kleinheubach (DE). **GOLITSCHKE EDLER VON ELBWART, Alexander** [DE/DE]; Wilhelminenstrasse 32, 64285 Darmstadt (DE). **SEIDEL, Eiko** [DE/DE]; Moosbergstrasse 97 a-b, 64285 Darmstadt (DE).

(74) Agent: **KUHL, Dietmar**; Grünecker, Kinkeldey, Stockmair & Schwanhäusser Anwaltssozietät, Maximilianstrasse 58, 80538 München (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: **CONSTELLATION REARRANGEMENT FOR TRANSMIT DIVERSITY SCHEMES**

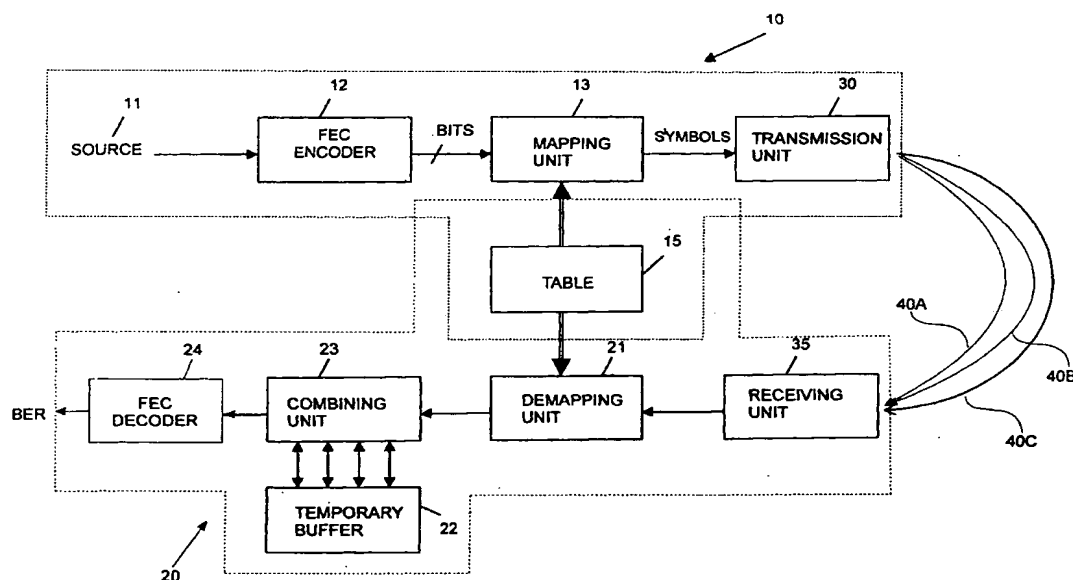

(57) Abstract: A method of transmitting data in a wireless communication system from a transmitter to a receiver, comprising the steps of modulating data at the transmitter using a first signal constellation pattern to obtain a first data symbol. The first data symbol is transmitted to the receiver using a first diversity branch. Further, the data is modulated at the transmitter using a second signal constellation pattern to obtain a second data symbol. Then, the second data symbol is transmitted to the receiver over a second diversity path. Finally, the received first and second data symbol are diversity combined at the receiver. The invention further relates to a transmitter and a receiver embodies to carry out the method of invention.

WO 2004/036817 A1

WO 2004/036817 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## CONSTELLATION REARRANGEMENT FOR TRANSMIT DIVERSITY SCHEMES

The present invention relates generally to transmission techniques in wireless communication systems and in particular to a method, transceiver and receiver using transmit diversity schemes wherein the bit-to-symbol mapping is performed differently for different transmitted diversity branches. The invention is particularly applicable to systems with unreliable and time-varying channel conditions resulting in an improved performance avoiding transmission errors.

There exist several well known transmit diversity techniques wherein one or several redundancy versions relating to identical data are transmitted on several (at least two) diversity branches "by default" without explicitly requesting (by a feedback channel) further diversity branches (as done in an ARQ scheme by requesting retransmissions). For example the following schemes are considered as transmit diversity:

- **Site Diversity:** The transmitted signal originates from different sites, e.g. different base stations in a cellular environment.
- **Antenna Diversity:** The transmitted signal originates from different antennas, e.g. different antennas of a multi-antenna base station.
- **Polarization Diversity:** The transmitted signal is mapped onto different polarizations.
- **Frequency Diversity:** The transmitted signal is mapped e.g. on different carrier frequencies or on different frequency hopping sequences.
- **Time Diversity:** The transmitted signal is e.g. mapped on different interleaving sequences.
- **Multicode Diversity:** The transmitted signal is mapped on different codes in e.g. a CDMA (Code Division Multiple Access) system.

There are known several diversity combining techniques. The following three techniques are the most common ones:

- **Selection Combining:** Selecting the diversity branch with the highest SNR for decoding, ignoring the remaining ones.

- Equal Gain Combining: Combining received diversity branches with ignoring the differences in received SNR.
- Maximal Ratio Combining: Combining received diversity branches taking the received SNR of each diversity branch into account. The combining can be performed at bit-level (e.g. *LLR*) or at modulation symbol level.

Furthermore, a common technique for error detection/correction is based on Automatic Repeat reQuest (ARQ) schemes together with Forward Error Correction (FEC), called hybrid ARQ (HARQ). If an error is detected within a packet by the Cyclic Redundancy Check (CRC), the receiver requests the transmitter to send additional information (retransmission) to improve the probability to correctly decode the erroneous packet.

In WO-02/067491 A1 a method for hybrid ARQ transmissions has been disclosed which averages the bit reliabilities over successively requested retransmissions by means of signal constellation rearrangement.

As shown therein, when employing higher order modulation formats (e.g. *M*-PSK, *M*-QAM with  $\log_2(M) > 2$ ), where more than 2 bits are mapped onto one modulation symbol, the bits mapped onto a modulation symbol have different reliabilities depending on their content and depending on the chosen mapping. This leads for most FEC (e.g. Turbo Codes) schemes to a degraded decoder performance compared to an input of more equally distributed bit reliabilities.

In conventional communication systems the modulation dependent variations in bit reliabilities are not taken into account and, hence, usually the variations remain after combining the diversity branches at the receiver.

The object of the invention is to provide a method, transmitter and receiver which show an improved performance with regard to transmission errors. This object is solved by a method, transmitter and receiver as set forth in the independent claims.

The invention is based on the idea to improve the decoding performance at the receiver by applying different signal constellation mappings to the available distinguishable transmit diversity branches. The idea is applicable to modulation formats, where more than 2 bits are mapped onto one modulation symbol, since this implies a variation in reliabilities for the bits mapped onto the signal constellation (e.g.

for regular BPSK and QPSK modulation all bits mapped onto a modulation symbol have the same reliability). The variations depend on the employed mapping and on the actually transmitted content of the bits.

Depending on the employed modulation format and the actual number of bits mapped onto a single modulation symbol, for a given arbitrary number ( $N > 1$ ) of available diversity branches the quality of the averaging process is different. Averaging in the sense of the present invention is understood as a process of reducing the differences in mean combined bit reliabilities among the different bits of a data symbol. Although it might be that only after using several diversity branches or paths a perfect averaging with no remaining differences is achieved, averaging means in the context of the document any process steps in the direction of reducing the mean combined bit reliability differences. Assuming on average an equal *SNR* for all available diversity branches, for 16-QAM 4 mappings (4 diversity branches) would be needed to perfectly average out the reliabilities for all bits mapped on any symbol. However, if e.g. only 2 branches are available a perfect averaging is not possible. Hence, the averaging should then be performed on a best effort basis as shown in the example below.

The present invention will be more readily understood from the following detailed description of preferred embodiments with reference to the accompanying figures which show:

- FIG. 1 an example for a 16-QAM signal constellation;
- FIG. 2 an example for a different mapping of a 16-QAM signal constellation;
- FIG. 3 two further examples of 16-QAM signal constellations;
- FIG. 4 an exemplary embodiment of a communication system according to the present invention; and
- FIG. 5 details of a table for storing a plurality of signal constellation patterns.

The following detailed description is shown for a square 16-QAM with Gray mapping. However, without loss of generality the shown example is extendable to other *M*-QAM and *M*-PSK (with  $\log_2(M) > 2$ ) formats. Moreover, the examples are shown for transmit diversity schemes transmitting an identical bit-sequence on both branches (single redundancy version scheme). Then again, an extension to a

transmit diversity scheme transmitting only partly identical bits on the diversity branches can be accomplished. An example for a system using multiple redundancy versions is described in copending EP 01127244, filed on November 16, 2001. Assuming a turbo encoder, the systematic bits can be averaged on a higher level as compared to the parity bits.

Assuming a transmit diversity scheme with two generated diversity branches, which are distinguishable at the receiver (e.g. by different spreading or scrambling codes in a CDMA system, or other techniques of creating orthogonal branches) and a transmission of the same redundancy version, usually the received diversity branches are combined at the receiver before applying the FEC decoder. A common combining technique is the maximal ratio combining, which can be achieved by adding the calculated log-likelihood-ratios *LLRs* from each individual received diversity branch.

The log-likelihood-ratio *LLR* as a soft-metric for the reliability of a demodulated bit *b* from a received modulation symbol  $r = x + jy$  is defined as follows:

$$LLR(b) = \ln \left[ \frac{\Pr\{b = 1|r\}}{\Pr\{b = 0|r\}} \right] \quad (1)$$

As can be seen from Figure 1 (bars indicate rows/columns for which the respective bit equals 1), the mappings of the in-phase component bits and the quadrature component bits on the signal constellation are orthogonal (for *M*-PSK the *LLR* calculation cannot be simplified by separating into complex components, however the general procedure of bit-reliability averaging is similar). Therefore, it is sufficient to focus on the in-phase component bits  $i_1$  and  $i_2$ . The same conclusions apply then for  $q_1$  and  $q_2$ .

Assuming that Mapping 1 from Figure 1 is applied for the bit-to-symbol mapping for the 1<sup>st</sup> diversity branch, the log-likelihood-ratio *LLR* of the most significant bit (MSB)  $i_1$  and the least significant bit (LSB)  $i_2$  yields the following equations for a Gaussian channel:

$$LLR(i_1) = \ln \left[ \frac{e^{-K(x+x_0)^2} + e^{-K(x+x_1)^2}}{e^{-K(x-x_0)^2} + e^{-K(x-x_1)^2}} \right] \quad (2)$$

$$LLR(i_2) = \ln \left[ \frac{e^{-K(x-x_1)^2} + e^{-K(x+x_1)^2}}{e^{-K(x-x_0)^2} + e^{-K(x+x_0)^2}} \right] \quad (3)$$

where  $x$  denotes the in-phase component of the normalized received modulation symbol  $r$  and  $K$  is a factor proportional to the signal-to-noise ratio. Under the assumption of a uniform signal constellation ( $x_1 = 3x_0$ , regular 16-QAM) equations (2) and (3) can be fairly good approximated as shown in S. Le Goff, A. Glavieux, C. Berrou, „Turbo-Codes and High Spectral Efficiency Modulation,“ IEEE SUPERCOMM/ICC '94, Vol. 2, pp. 645 -649, 1994, and Ch. Wengerter, A. Golitschek Edler von Elbwart, E. Seidel, G. Velez, M.P. Schmitt, „Advanced Hybrid ARQ Technique Employing a Signal Constellation Rearrangement,“ IEEE Proceedings of VTC 2002 Fall, Vancouver, Canada, September 2002 by

$$LLR(i_1) \approx -4Kx_0x \quad (4)$$

$$LLR(i_2) \approx -4Kx_0(2x_0 - |x|) \quad (5)$$

The mean  $LLR$  for  $i_1$  and  $i_2$  for a given transmitted modulation symbol yields the values given in Table 1 (substituting  $4Kx_0^2$  by  $\Lambda$ ). Mean in this sense, refers to that the mean received value for a given transmitted constellation point, exactly matches this transmitted constellation point. Individual samples of course experience noise according to the parameter  $K$ . However, for a Gaussian channel the mean value of the noise process is zero. In case of transmitted modulation symbols  $0q_11q_2$  and  $1q_11q_2$ , where  $q_1$  and  $q_2$  are arbitrary, the magnitude of the mean  $LLR(i_1)$  is higher than of the mean  $LLR(i_2)$ . This means that the  $LLR$  for the MSB  $i_1$  depends on the content of the LSB  $i_2$ ; e.g. in Figure 1  $i_1$  has a higher mean reliability in case the logical value for  $i_2$  equals 1 (leftmost and rightmost columns). Hence, assuming a uniform distribution of transmitted modulation symbols, on average 50 % of the MSBs  $i_1$  have about three times the magnitude in  $LLR$  of  $i_2$ .

Symbol ( $i_1q_1i_2q_2$ )	Mean value of $x$	Mean $LLR$ ( $i_1$ )	Mean $LLR$ ( $i_2$ )
$0q_10q_2$	$x_0$	$-4Kx_0^2 = -\Lambda$	$-4Kx_0^2 = -\Lambda$
$0q_11q_2$	$x_1$	$-12Kx_0^2 = -3\Lambda$	$4Kx_0^2 = \Lambda$
$1q_10q_2$	$-x_0$	$4Kx_0^2 = \Lambda$	$-4Kx_0^2 = -\Lambda$
$1q_11q_2$	$-x_1$	$12Kx_0^2 = 3\Lambda$	$4Kx_0^2 = \Lambda$

Table 1. Mean  $LLRs$  for bits mapped on the in-phase component of the signal constellation for Mapping 1 in Figure 1 according to equations (4) and (5).

If now adding a 2<sup>nd</sup> transmit diversity branch transmitting e.g. an identical bit sequence prior art schemes would employ an identical mapping to the 1<sup>st</sup> diversity branch. Here, it is proposed to employ a 2<sup>nd</sup> signal constellation mapping (Mapping 2) according to Figure 2 (of course, also one of the constellations depicted in Figure 3 are possible), which yields the mean  $LLRs$  given in Table 2.

Symbol ( $i_1q_1i_2q_2$ )	Mean value of $x$	Mean $LLR$ ( $i_1$ )	Mean $LLR$ ( $i_2$ )
$0q_10q_2$	$x_0$	$-\Lambda$	$-3\Lambda$
$0q_11q_2$	$x_1$	$-\Lambda$	$3\Lambda$
$1q_10q_2$	$-x_0$	$\Lambda$	$-\Lambda$
$1q_11q_2$	$-x_1$	$\Lambda$	$\Lambda$

Table 2. Mean  $LLRs$  for bits mapped on the in-phase component of the signal constellation for Mapping 2 in Figure 2.

Comparing now the soft-combined  $LLRs$  of the received diversity branches applying the constellation rearrangement (Mapping 1+2) and applying the identical mappings (Mapping 1+1, prior art), it can be observed from table 3 that the combined mean  $LLR$  values with applying the constellation rearrangement have a more uniform distribution (Magnitudes:  $4 \times 4\Lambda$  and  $4 \times 2\Lambda$  instead of  $2 \times 6\Lambda$  and  $6 \times 2\Lambda$ ). For most FEC decoders (e.g. Turbo Codes and Convolutional Codes) this leads to a better decoding performance. Investigations have revealed that in particular Turbo encoding/decoding systems exhibit a superior performance. It should be noted, that the chosen mappings are non exhaustive and more combinations of mappings fulfilling the same requirements can be found.



Transmit Diversity Branch	Symbol ( $i_1q_1i_2q_2$ )	Constellation Rearrangement (Mapping 1+2)		Prior Art No Rearrangement (Mapping 1+1)	
		Mean $LLR(i_1)$	Mean $LLR(i_2)$	Mean $LLR(i_1)$	Mean $LLR(i_2)$
1	$0q_10q_2$	$-\Lambda$	$-\Lambda$	$-\Lambda$	$-\Lambda$
	$0q_11q_2$	$-3\Lambda$	$\Lambda$	$-3\Lambda$	$\Lambda$
	$1q_10q_2$	$\Lambda$	$-\Lambda$	$\Lambda$	$-\Lambda$
	$1q_11q_2$	$3\Lambda$	$\Lambda$	$3\Lambda$	$\Lambda$
2	$0q_10q_2$	$-\Lambda$	$-3\Lambda$	$-\Lambda$	$-\Lambda$
	$0q_11q_2$	$-\Lambda$	$3\Lambda$	$-3\Lambda$	$\Lambda$
	$1q_10q_2$	$\Lambda$	$-\Lambda$	$\Lambda$	$-\Lambda$
	$1q_11q_2$	$\Lambda$	$\Lambda$	$3\Lambda$	$\Lambda$
Combined 1+2	$0q_10q_2$	$-2\Lambda$	$-4\Lambda$	$-2\Lambda$	$-2\Lambda$
	$0q_11q_2$	$-4\Lambda$	$-4\Lambda$	$-6\Lambda$	$2\Lambda$
	$1q_10q_2$	$2\Lambda$	$-2\Lambda$	$2\Lambda$	$-2\Lambda$
	$1q_11q_2$	$4\Lambda$	$2\Lambda$	$6\Lambda$	$2\Lambda$

Table 3. Mean  $LLRs$  (per branch) and combined mean  $LLRs$  for bits mapped on the in-phase component of the signal constellation for the diversity branches when employing Mapping 1 and 2 and when employing 2 times Mapping 1.

In the following an example with 4 diversity branches will be described. Here, the same principles apply as for 2 diversity branches. However, since 4 diversity branches are available and the averaging with 2 diversity branches is not perfect, additional mappings can be used to improve the averaging process.

Figure 3 shows the additional mappings for diversity branches 3 and 4, under the assumption that Mappings 1 and 2 are used for branches 1 and 2 (in Figure 1 and Figure 2). Then the averaging can be performed perfectly and all bits mapped on any symbol will have an equal mean bit reliability (assuming the same  $SNR$  for all transmissions). Table 4 compares the  $LLRs$  with and without applying the proposed Constellation Rearrangement. Having a closer look at the combined  $LLRs$ , it can be seen that with application of the Constellation Rearrangement the magnitude for all bit reliabilities results in  $6\Lambda$ .

It should be noted again, that the chosen mappings are non exhaustive and more combinations of mappings fulfilling the same requirements can be found.

Transmit Diversity Branch	Symbol ( $i_1 q_1 i_2 q_2$ )	Constellation Rearrangement (Mapping 1+2+3+4)		Prior Art No Rearrangement (Mapping 1+1+1+1)	
		Mean $LLR(i_1)$	Mean $LLR(i_2)$	Mean $LLR(i_1)$	Mean $LLR(i_2)$
1	$0q_1 0q_2$	$-\Lambda$	$-\Lambda$	$-\Lambda$	$-\Lambda$
	$0q_1 1q_2$	$-3\Lambda$	$\Lambda$	$-3\Lambda$	$\Lambda$
	$1q_1 0q_2$	$\Lambda$	$-\Lambda$	$\Lambda$	$-\Lambda$
	$1q_1 1q_2$	$3\Lambda$	$\Lambda$	$3\Lambda$	$\Lambda$
2	$0q_1 0q_2$	$-\Lambda$	$-3\Lambda$	$-\Lambda$	$-\Lambda$
	$0q_1 1q_2$	$-\Lambda$	$3\Lambda$	$-3\Lambda$	$\Lambda$
	$1q_1 0q_2$	$\Lambda$	$-\Lambda$	$\Lambda$	$-\Lambda$
	$1q_1 1q_2$	$\Lambda$	$\Lambda$	$3\Lambda$	$\Lambda$
3	$0q_1 0q_2$	$-\Lambda$	$-\Lambda$	$-\Lambda$	$-\Lambda$
	$0q_1 1q_2$	$-\Lambda$	$\Lambda$	$-3\Lambda$	$\Lambda$
	$1q_1 0q_2$	$\Lambda$	$-3\Lambda$	$\Lambda$	$-\Lambda$
	$1q_1 1q_2$	$\Lambda$	$3\Lambda$	$3\Lambda$	$\Lambda$
4	$0q_1 0q_2$	$-3\Lambda$	$-\Lambda$	$-\Lambda$	$-\Lambda$
	$0q_1 1q_2$	$-\Lambda$	$\Lambda$	$-3\Lambda$	$\Lambda$
	$1q_1 0q_2$	$3\Lambda$	$-\Lambda$	$\Lambda$	$-\Lambda$
	$1q_1 1q_2$	$\Lambda$	$\Lambda$	$3\Lambda$	$\Lambda$
Combined 1+2+3+4	$0q_1 0q_2$	$-6\Lambda$	$-6\Lambda$	$-4\Lambda$	$-4\Lambda$
	$0q_1 1q_2$	$-6\Lambda$	$6\Lambda$	$-12\Lambda$	$4\Lambda$
	$1q_1 0q_2$	$6\Lambda$	$-6\Lambda$	$4\Lambda$	$-4\Lambda$
	$1q_1 1q_2$	$6\Lambda$	$6\Lambda$	$12\Lambda$	$4\Lambda$

Table 4. Mean  $LLRs$  (per branch) and combined mean  $LLRs$  for bits mapped on the in-phase component of the signal constellation for the diversity branches when employing Mappings 1 to 4 and when employing 4 times Mapping 1.

If the constellation rearrangement is performed by applying different mapping schemes, one would end up in employing a number of different mappings as given in Figure 1, Figure 2 and Figure 3. If the identical mapper (e.g. Figure 1) should be kept for all transmit diversity branches, e.g. mapping 2 can be obtained from mapping 1 by the following operations:

- exchange positions of original bits  $i_1$  and  $i_2$
- exchange positions of original bits  $q_1$  and  $q_2$
- logical bit inversion of original bits  $i_1$  and  $q_1$

Alternatively, those bits that end in positions 1 and 2 can also be inverted (resulting in a different mapping with an identical bit-reliability characteristics).

Therefore, the following table provides an example how to obtain mappings 1 to 4 (or mappings with equivalent bit reliabilities for  $i_1$ ,  $i_2$ ,  $q_1$  and  $q_2$ ), where the bits always refer to the first transmission, and a long dash above a character denotes logical bit inversion of that bit:

Mapping No.	Interleaver and Inverter functionality
1	$i_1 q_1 i_2 q_2$
2	$\bar{i}_2 \bar{q}_2 \bar{i}_1 \bar{q}_1$ or $i_2 q_2 \bar{i}_1 \bar{q}_1$
3	$\bar{i}_2 \bar{q}_2 i_1 q_1$ or $i_2 q_2 i_1 q_1$
4	$i_1 q_1 \bar{i}_2 \bar{q}_2$ or $\bar{i}_1 \bar{q}_1 \bar{i}_2 \bar{q}_2$

Table 5. Alternative implementation of the Constellation Rearrangement by interleaving (intra-symbol interleaving) and logical inversion of bits mapped onto the modulation symbols.

Generally at least 2 different mappings should be employed for  $N > 1$  diversity branches, where the order and the selection of the mappings is irrelevant, as long as the bit-reliability averaging process, meaning the (reduction of differences in reliabilities) is maintained.

Preferred realizations in terms of number of employed mappings

- *M*-QAM
  - Employing  $\log_2(M)$  different mappings
  - Employing  $\log_2(M)/2$  different mappings
- *M*-PSK
  - Employing  $\log_2(M)$  different mappings
  - Employing  $\log_2(M)/2$  different mappings
  - Employing  $2\log_2(M)$  different mappings

The applied signal constellation mappings for modulation at the transmitter and demodulation at the receiver need to match for each individual transmit diversity branch. This can be achieved by appropriate signalling of parameters indicating the proper mapping or combination of mappings to be applied for the diversity branches. Alternatively the definition of the mappings to be applied for transmit diversity branches may be system predefined.

Figure 4 shows an exemplary embodiment of a communication system according to the present invention. More specifically, the communication system comprises a transmitter 10 and a receiver 20 which communicate through a communication channel consisting of a plurality of diversity branches 40A, 40B and 40C. Although three diversity branches are illustrated in the figure, it becomes clear to a person skilled in the art that an arbitrary number of branches may be chosen. From a data source 11, data packets are supplied to a FEC encoder 12, preferably a FEC Turbo encoder, where redundancy bits are added to correct errors. The bits output from the FEC encoder are subsequently supplied to a mapping unit 13 acting as a modulator to output symbols formed according to the applied modulation scheme stored as a constellation pattern in a table 15. Subsequently the data symbols are applied to a transmission unit 30 for transmission over the branches 40A – C. The receiver 20 receives the data packets by the receiving unit 35. The bits are then input into a demapping unit 21 which acts as a demodulator using the same signal constellation pattern stored in the table 15 which was used during the modulation of that symbol.

The demodulated data packets received over one diversity branch are stored in a temporary buffer 22 for subsequent combining in a combining unit 23 with the data packets received over at least one other diversity branch.

As illustrated in figure 5, table 15 stores a plurality of signal constellation patterns #0..#n which are selected for the individual transmissions over the individual diversity branches according to a predetermined scheme. The scheme, i.e. the sequence of signal constellation patterns used for modulating/demodulating are either pre-stored in the transmitter and the receiver or are signalled by transmitter to the receiver prior to usage.

## CLAIMS

1. A method of transmitting data in a wireless communication system from a transmitter to a receiver, comprising the steps of  
  
modulating data at the transmitter using a first signal constellation pattern to obtain a first data symbol,  
  
transmitting the first data symbol to the receiver over a first diversity branch;  
  
modulating said data at the transmitter using a second signal constellation pattern to obtain a second data symbol;  
  
transmitting the second data symbol to the receiver over a second diversity branch;  
  
demodulating the received first and second data symbol at the receiver using the first and respectively second signal constellation pattern; and  
  
diversity combining the demodulated data.
2. The method according to claim 1, wherein the data to be transmitted contains at least one data packet comprising a plurality of data bits which are encoded using a forward error correction (FEC) scheme prior to modulation.
3. The method according to claim 2, wherein employed encoding scheme is a Turbo coding scheme.
4. The method according to one of claims 1 or 3, wherein the employed modulation scheme is a higher order modulation scheme such as M-PSK, M-QAM with  $\log_2 (M) > 2$  wherein the data bits mapped onto the data symbols have different bit reliabilities depending on the chosen mapping.
5. The method according to one of claims 1 to 4, wherein the signal constellation pattern for the first and second diversity branches are selected such that after combining the data bits, the differences in magnitude among the combined bit reliabilities are reduced.
6. The method according to one of claims 1 to 5, wherein the number of different mappings is equal to  $\log_2(M)$ .

7. The method according to one of claims 1 to 6, wherein the data for transmission is modulated using a single redundancy version scheme with an identical data bit sequence.
8. The method according to one of claims 1 to 7, wherein the data for transmission is modulated using a multiple redundancy version scheme of partly identical bits.
9. The method according to one of claims 1 to 8, wherein the first and second signal constellation patterns are pre-stored in a memory table.
10. The method according to one of claims 1 to 9, wherein the first and second signal constellation patterns are signaled to the receiver.
11. The method according to one of claims 1 to 10, wherein the properties of the first and second signal constellation patterns are obtained by interleaving the positions of and/or inverting the bit values of the bits mapped onto the signal constellation patterns.
12. The method according to one of claims 1 to 11, wherein the interleaving is performed with symbols resulting in an intra-symbol interleaving.
13. The method according to one of claims 1 to 12, wherein the data is transmitted with a plurality of redundancy versions, and the transmitted bits comprise systematic and parity bits and the systematic bits are included in each redundancy version.
14. The method according to one of claims 1 to 13, wherein the combined mean bit reliabilities for the systematic bits are higher than that of the parity bits.
15. A transmitter for transmitting data in a wireless communication system to a receiver, comprising:
  - a mapping unit for modulating data using a first signal constellation pattern to obtain a first data symbol;
  - a transmitting unit for transmitting the first data symbol to the receiver using a first diversity branch;

said mapping unit modulating said data using a second signal constellation pattern to obtain a second data symbol; and

said transmitting unit transmitting the second data symbol to the receiver using a second diversity branch.

16. The transmitter according to claim 15, further comprising table means for pre-storing the first and second signal constellation pattern.
17. The transmitter according to claim 15, further comprising an interleaver and/or inverter to obtain different signal constellation patterns.
18. The transmitter according to one of claims 15 to 17, further comprising a forward error correction (FEC) encoder for encoding the data prior to modulation.
19. A receiver as part of a wireless communication system, comprising:

receiving means for receiving a first and second data symbol respectively modulated using a first and second signal constellation pattern and transmitted over a first and second diversity branch, and

a demapping unit for demodulating the received first and second data symbol using the first and second constellation pattern respectively,

a combining unit for diversity combining the received data symbols.
20. The receiver according to claim 19, further comprising a memory means for storing received data prior to combining same.
21. The receiver according to claim 19 or 20, further comprising a forward error correction (FEC) decoder for decoding the combined first and second data after diversity combining.

1/5

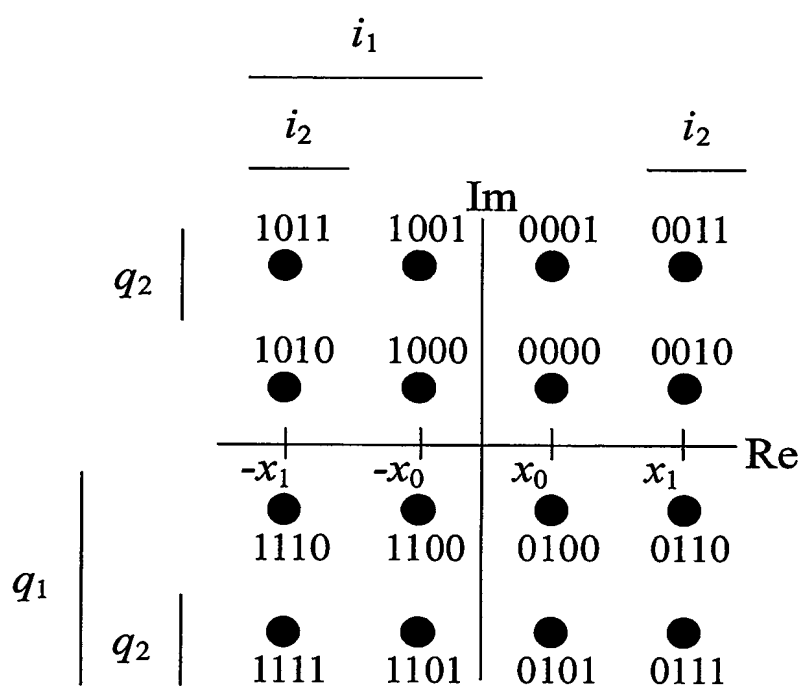
Mapping 1 (bit-mapping order:  $i_1 q_1 i_2 q_2$ )

FIG. 1



2/5

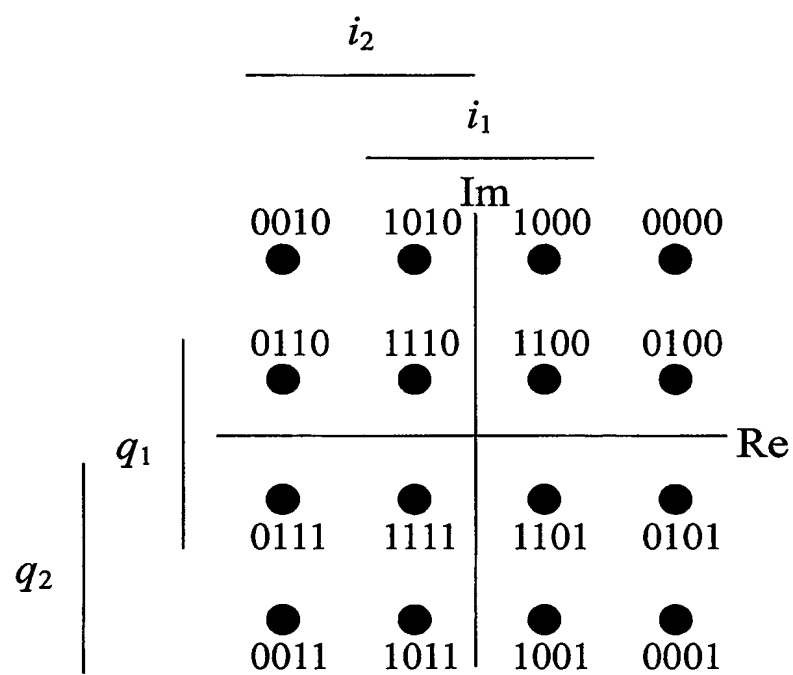
Mapping 2 (bit-mapping order:  $i_1 q_1 i_2 q_2$ )

FIG. 2

3/5

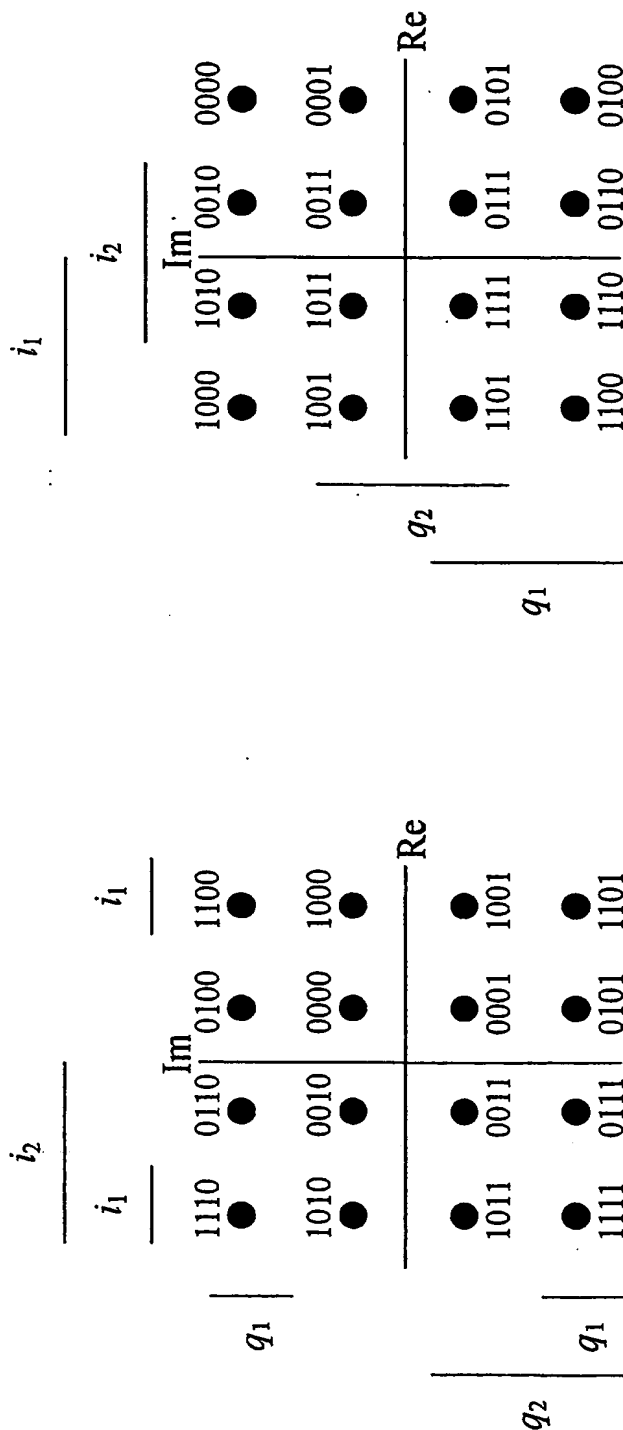


FIG. 3A

FIG. 3B

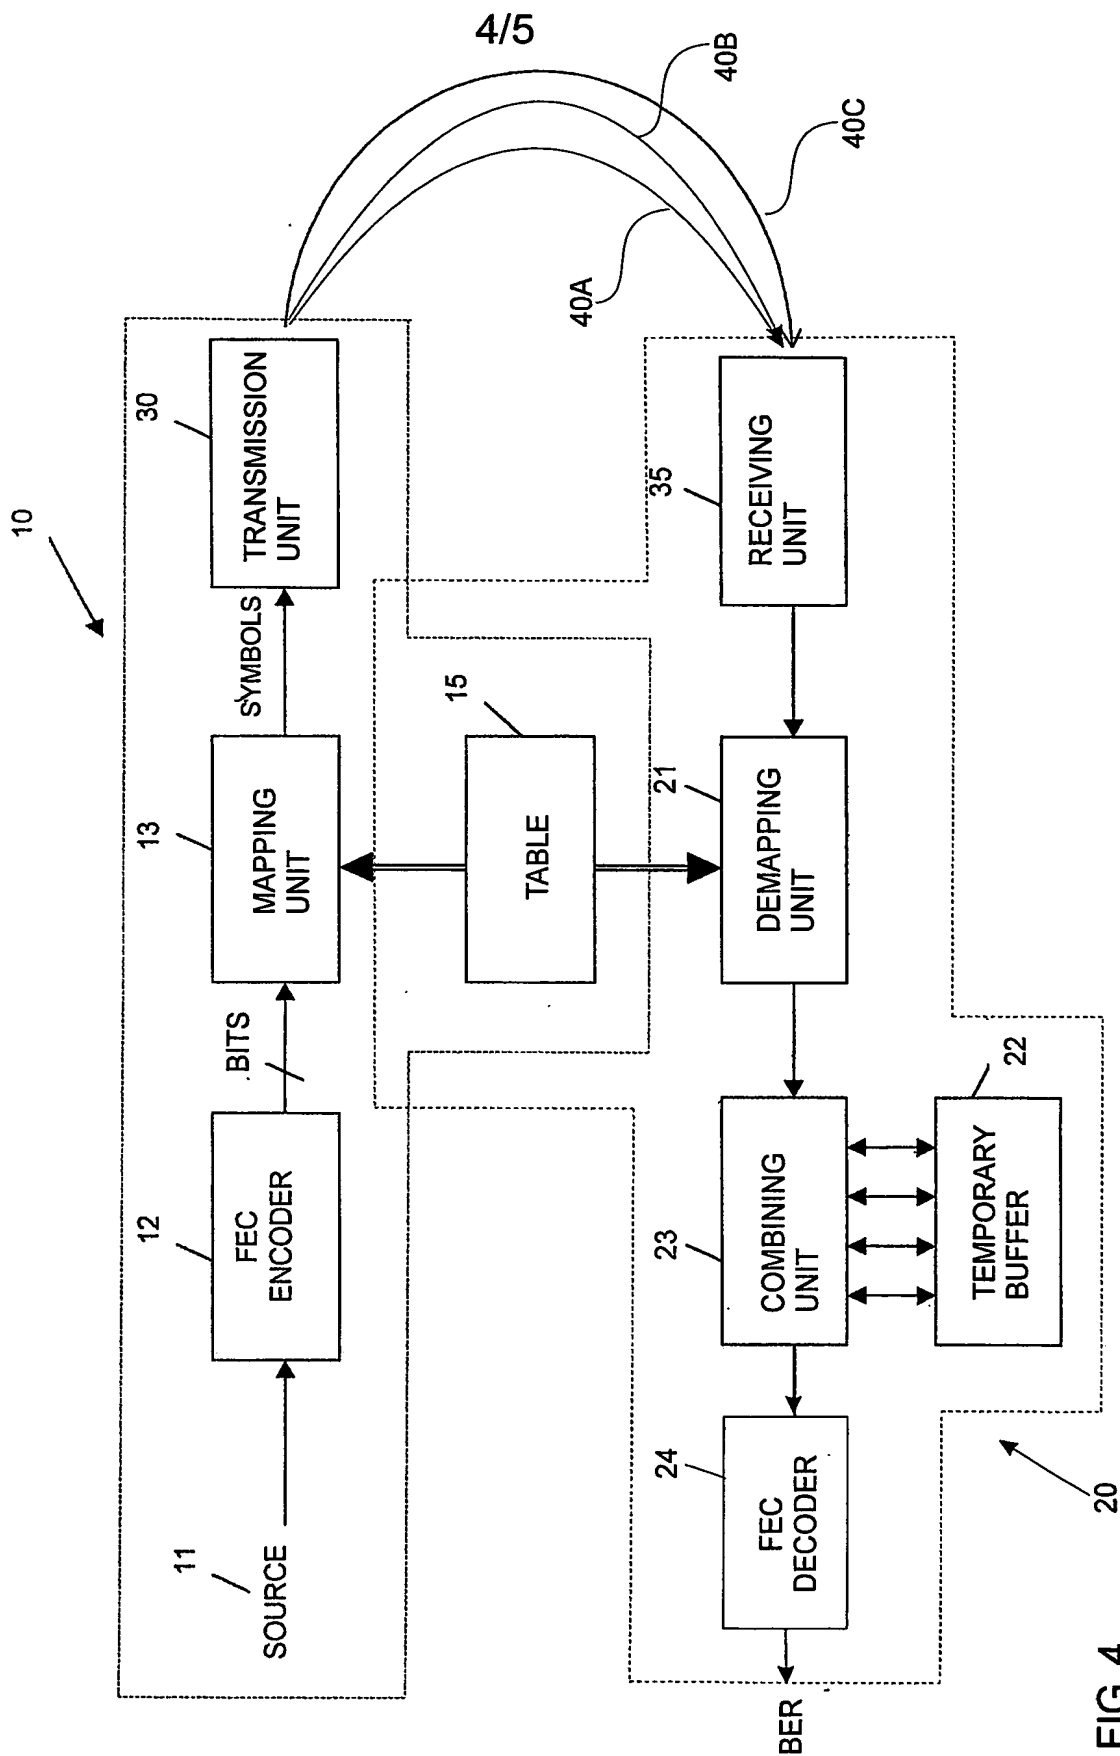


FIG. 4

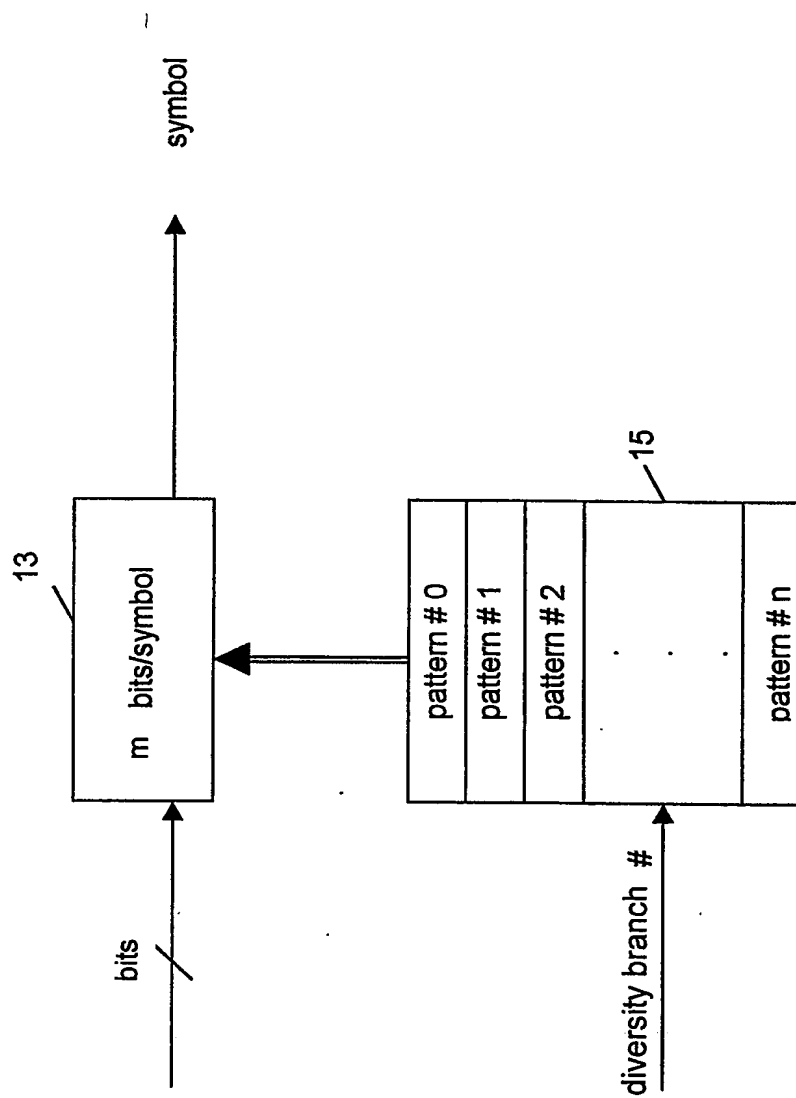


FIG. 5

## INTERNATIONAL SEARCH REPORT

Internat<sup>l</sup> Classification No  
PCT/EP/11695A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04L1/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 2002/036980 A1 (LUNDBY STEIN S ET AL) 28 March 2002 (2002-03-28)</p> <p>page 2, right-hand column, paragraphs 18,20 page 3, left-hand column, paragraphs 22-24 page 3, right-hand column, paragraphs 33,35 page 4, left-hand column, paragraphs 40,41 page 4, right-hand column, paragraph 48 page 5, left-hand column, paragraphs 49,59; figures 2,3</p> <p style="text-align: center;">----- -/-</p>	<p>1-3,8, 11-13, 15, 17-19,21</p>

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

18 June 2003

Date of mailing of the international search report

26/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Papantoniou, A

# INTERNATIONAL SEARCH REPORT

Internat. Application No.  
PCT/EP 11695

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 096 718 A (LUCENT TECHNOLOGIES INC) 2 May 2001 (2001-05-02)  page 2, paragraphs 6,7,10 page 3, paragraphs 15-17 page 4, paragraphs 19,20; figures 1,2	1,2,7,9, 10,15, 16,18-21
A	AIK CHINDAPOL ET AL: "Bit-interleaved coded modulation with signal space diversity in Rayleigh fading" SIGNALS, SYSTEMS, AND COMPUTERS, 1999. CONFERENCE RECORD OF THE THIRTY-THIRD ASILOMAR CONFERENCE ON OCT. 24-27, 1999, PISCATAWAY, NJ, USA, IEEE, US, 24 October 1999 (1999-10-24), pages 1003-1007, XP010373787 ISBN: 0-7803-5700-0 page 1003, right-hand column, line 32 -page 1004, left-hand column, line 2 page 1004, right-hand column, line 13 - line 24 page 1004, right-hand column, line 33 - line 40; figures 1,2	1,15,19
A	OZTURK E ET AL: "A COMBINED INTERLEAVING TECHNIQUE FOR TRELLIS CODED MPSK SYSTEMS IN RAYLEIGH FADING CHANNELS" WIRELESS PERSONAL COMMUNICATIONS, KLUWER ACADEMIC PUBLISHERS, NL, vol. 16, no. 3, 1 March 2001 (2001-03-01), pages 245-257, XP001001794 ISSN: 0929-6212 page 246, paragraph 2.2 page 247, paragraph 2.3 page 247, line 7, paragraph 3.1 - line 28 figure 1	1,15,19

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 11695

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002036980	A1	28-03-2002	US 6356528 B1 12-03-2002
			AU 4235600 A 02-11-2000
			BR 0009766 A 05-03-2002
			CA 2369959 A1 26-10-2000
			CN 1346548 T 24-04-2002
			EP 1169790 A1 09-01-2002
			JP 2002542713 T 10-12-2002
			NO 20014975 A 04-12-2001
			WO 0064073 A1 26-10-2000
EP 1096718	A	02-05-2001	CA 2322930 A1 28-04-2001
			EP 1096718 A2 02-05-2001
			JP 2001177459 A 29-06-2001